




HaloRed 02

1-Person

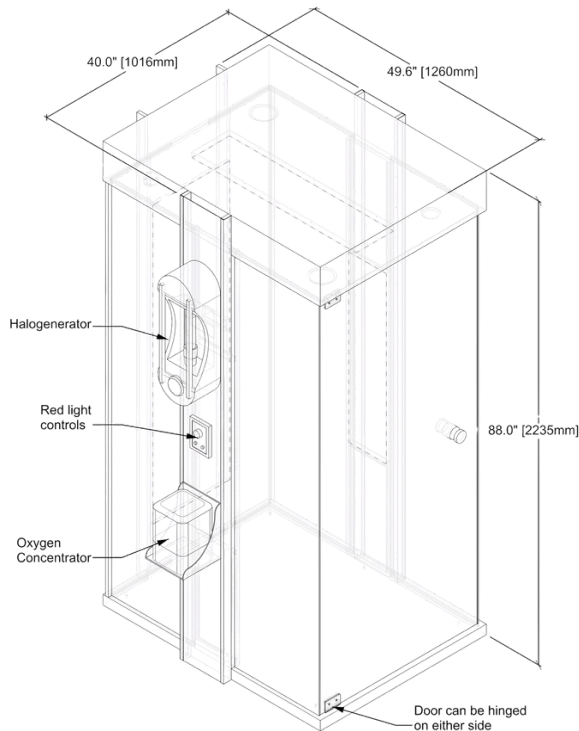


Top View

Power Supply is located on the top of the unit.
The cord is approximately 8 feet long.

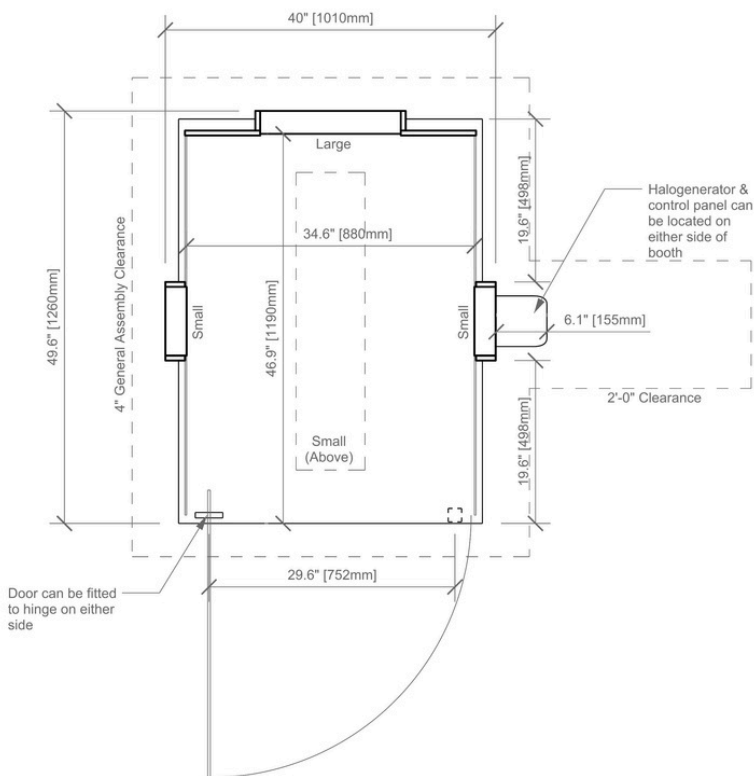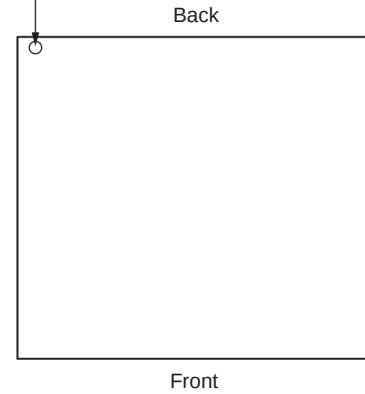

Power Requirements

[US] 120V / 30A outlet required
[UK/EU] 230V / 15A outlet required
Plug type: NEMA L5-30p



* The HaloRed must be on a dedicated breaker.
*Appropriate plug type for country will be supplied if outside of the US as long as specified at time of ordering.

Installation

Assembling this unit will require 2-3 able bodied individuals and will take roughly 90-120 minutes to complete. We recommend having a step stool, box cutter, and drill. Please consult an electrician to ensure you have the correct outlet and amps required. Click [HERE](#) to view the full assembly guide.

SPECIFICATIONS

Construction

Tempered glass exterior with a wood base and ceiling, support columns made of plastic, plywood and metal Slot Construction. Wall panels are high density MDF and cardboard honeycomb construction
Weight: 518 lbs (235kg)

Exterior

Width: 40" (1010 mm)
Depth: 49.6" (1260 mm)
Height: 88" (2235 mm)
Door: 29.60" (752mm)

Red Light Panels

Large: x1
LEDs - 600
Power - 3000W
Size - 64*17*2.76"
(1625*430*70mm)

Small: x3
LEDs - 200
Power - 1000W
Size - 35.8*8.3*2.6"
(910*210*65mm)

5-year Warranty Lifetime Warranty

Cabinetry & Glass
Electrical
Controls

Halogenerator

2-Year Warranty

Red Light Panels